

**Note!**

Please note that this image is a general representation of the product and may differ slightly from your product.

**Note!**

Please note that during storage and transportation, especially at high ambient temperature, some of the oil and grease used for assembling may leak and stain the packaging. This is in no way detrimental to the product, wipe off the excessive oil/grease with a cloth.

**Note!**

Before installing this product, check the contents of the kit. If anything is missing, please check an Öhlins dealer.

**Kit Contents**

Description	Part No	Pcs
Shock absorber	HO 231	1
Tool preload adjuster	03199-03	1
Screw M8x35	00432-01	1
Sticker set "ÖHLINS"	10207-01	1
Owners manual road & track	07241-02	1
<b>Alternative spring</b>		
Spring prog 36-55 N/mm	60360-21	1

**Warning!**

Before installing this product, read the Öhlins Owner's Manual. The shock absorber is an important part of your vehicle and will affect the stability.

## Shock Absorber for Honda Click160i-2022

# HO 231

### Mounting Instructions

# MOUNTING INSTRUCTIONS

## **⚠ Warning!**

*It is advisable to have an Öhlins dealer install the shock absorber.*

## **👁 Note!**

*Before mounting this product clean the vehicle thoroughly.*

## **⚠ Warning!**


*If working on a raised vehicle, ensure it is securely supported so that it will not tip over.*

## **👁 Note!**

*When working on this product, always see the Vehicle Service Manual for vehicle specific procedures and important data.*

1

Put the motorcycle on a work stand so that the rear wheel barely touches the ground. Make sure the motorcycle is in a stable position.

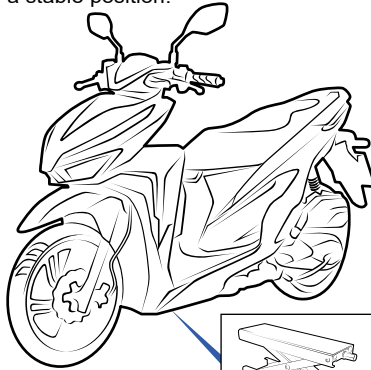

2



Open the seat by using the ignition key.

2.1

Loosen the screws ①②③④ of the motorcycle in order to remove the rubber cover **A**.

2.1

Loosen the screws ⑤⑥⑦⑧ on both sides of the motorcycle in order to remove the plastic cover **B**.

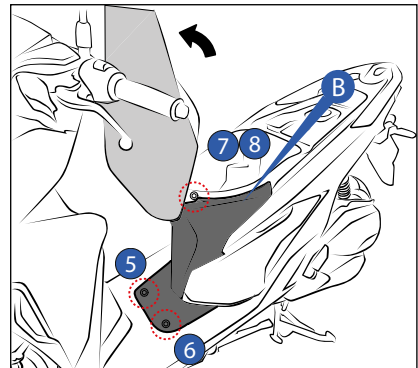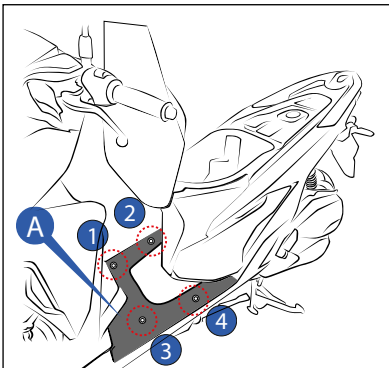

# MOUNTING INSTRUCTIONS

3


Remove the grab bar **C** by loosening the screws **1****2****3**.

3.1

Remove the fuel cover **D** by loosening the screws **4****5**.


3.2

Loosen the screws **6****7****8** and lift up the storage box **E**.

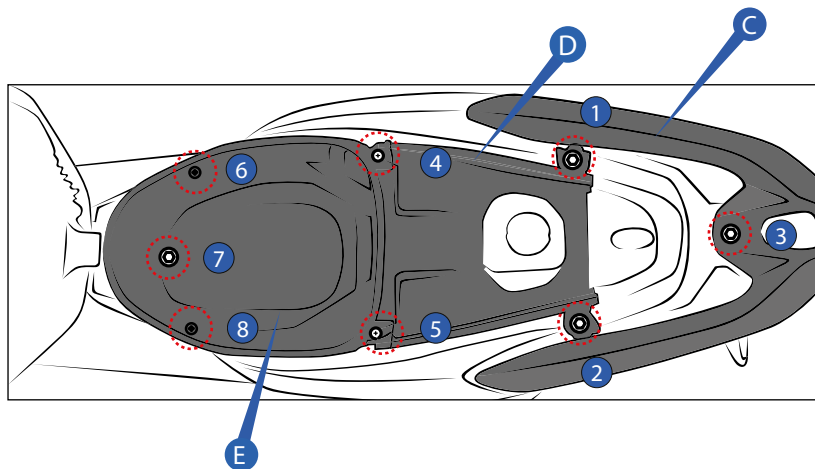

4


Remove the plastic push-clip and unlock the wiring in order to remove the storage box **E**.

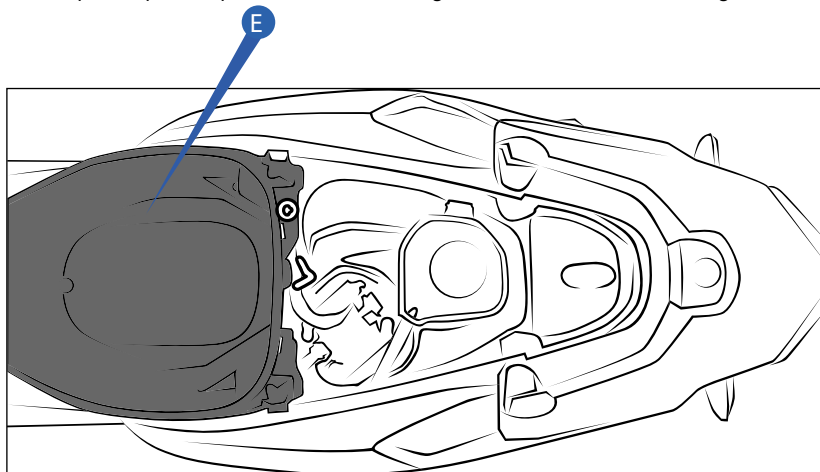

# MOUNTING INSTRUCTIONS

5

Loosen the screws ①② are located on both side of the motorcycle ⑥.


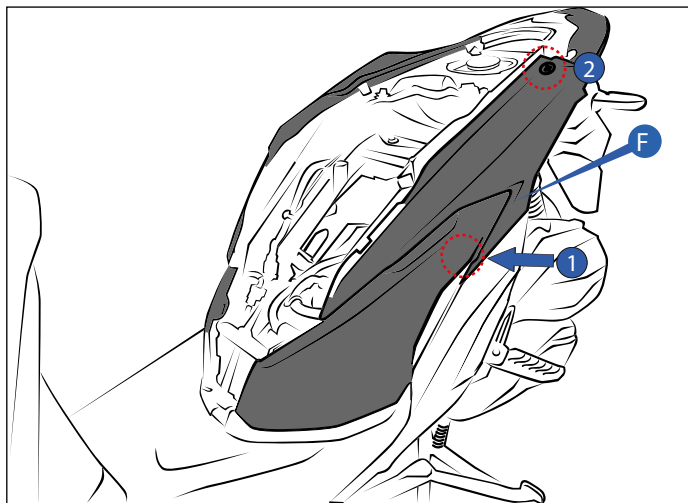


6

Remove the standard shock absorber

6.1 Loosen the screws ③④⑤ of fuel tank for providing access to the shock absorber top mounting screws ⑥.

6.2 Loosening the upper and lower mounting bolts ⑥⑦

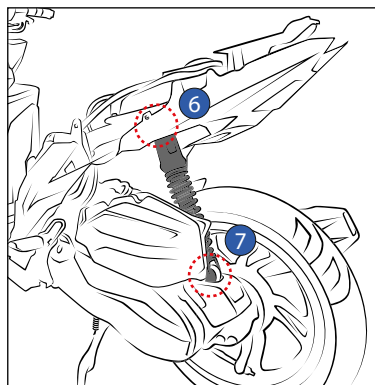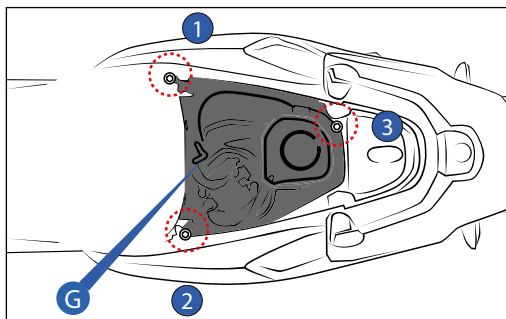


# MOUNTING INSTRUCTIONS

7

Reinstall the Öhlins shock absorber by tightening the upper mounting bolts ①② at a torque value as specified in the vehicle service manual.

Reverse all procedure as necessary.

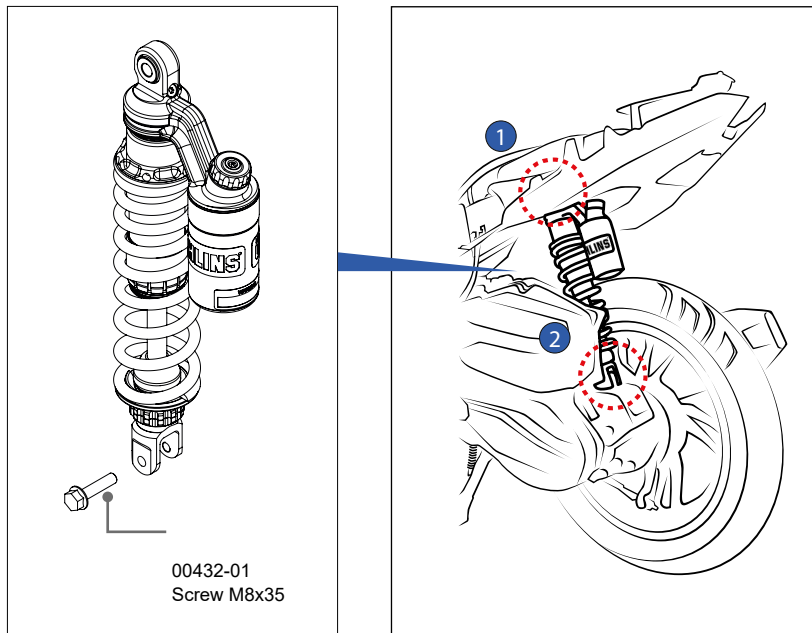

## **Note!**

*Lower the vehicle so that the suspension is slightly compressed before tightening the screws.*

## **Caution!**

*Ensure that all screws are tightened to the correct torque and that nothing fouls or restricts movement of the shock absorber when the suspension is fully compressed or extended.*


This page intentionally left blank

This page intentionally left blank

# ADJUSTMENTS

## **⚠ Warning!**

Before riding, always make sure that the basic settings made by Öhlins are according to recommended Set-up Data. Read about adjustments and setting up in the Öhlins Owner's Manual before you make any adjustments. Contact an Öhlins dealer if you have any questions about setting up.

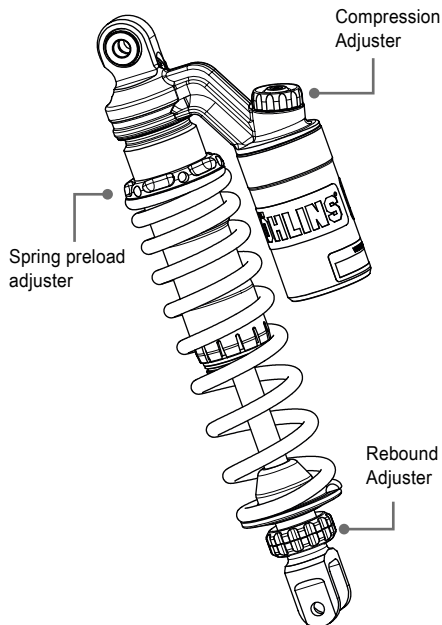

# SET-UP DATA

## Recommended set-up

Spring Preload..... 3 mm.  
Compression adjuster 18 Clicks  
Rebound adjuster ..... 18 Clicks

## Spring Installed spring

Part No ..... 60360-08  
Free spring length... 200 mm.  
Spring rate..... 31-44 N/mm  
Preload adj.range.... [0-16] mm  
For rider's weight.... Below 80 kg

## Shock absorber data

Length ..... 341 mm.  
Stroke ..... 86 mm.

## Alternative spring

60360-21  
200 mm.  
36-55 N/mm (Yellow)  
[0-13] mm  
Above 80 kg

👁 Öhlins products are subject to continuous improvement and development, therefore, although these instructions include the most up-to-date information available at the time of printing, minor updates may occur.

To find the latest information contact an Öhlins distributor. Please contact Öhlins if you have any questions regarding the contents in this document.

Part no. MI\_HO 231\_EN\_0  
Issued 2023-05-15

© Öhlins Asia Co. Ltd. All rights reserved. Any reprinting or unauthorized use without the written permission of Öhlins Racing AB is prohibited.

Öhlins Asia Co. Ltd  
700/937 Moo5, Tambol Nongkhaga,  
Amphur Phantong, Chonburi Province  
20160 Thailand



[www.ohlins.com](http://www.ohlins.com)